


Redefine your easy network

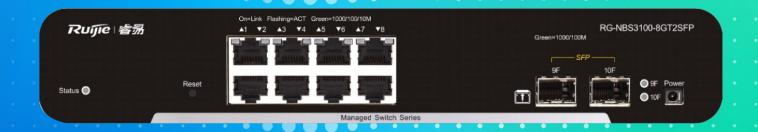

RG-NBS3100 Series

Layer 2 Switches

Datasheet



1 Product Photo



Fig 1 RG-NBS3100-24GT4SFP




Fig 2 RG-NBS3100-8GT2SFP




Fig 3 RG-NBS3100-24GT4SFP-P



Fig 4 RG-NBS3100-8GT2SFP-P



2 Product Overview

Ruijie Real-easy RG-NBS3100 Managed Switch Series consists 4 models of switches designed for SME customers to meet their different network needs including basic VLAN division and advanced security features such as ACL. The models with suffix -P support PoE, which can meet the PoE requirements of wireless APs, digital cameras and other devices in various scenarios.



3 Product Features

Flexible VLAN Division

In the office network, in order to isolate network access between different departments to avoid PCs infected by virus affecting the entire network, it is often necessary to divide the internal network into VLANs according to departments, floors, etc. to isolate the broadcast domain and improve the stability of the network. Ruijie Real-easy Series managed switches provide a convenient and flexible way to divide VLANs, allowing you to assign the ports to different VLANs as needed. Users in different VLANs do not affect each other, creating a more stable network for the users.

Surge Protection Ensuring Product Stability

The 6KV surge protection of the port reduces the probability of being damaged by surges and improves the customer's network stability.

MANET for Switches Allowing One-step Project Management

RG-NBS3100 can obtain the IP address automatically from the gateway and connect to the external network without configuration. It also supports MANET for switches. Users can scan the QR code of any switch in the network using the Ruijie Cloud app to automatically add all switches in the network to the project.

Ruijie Cloud App/ Ruijie Cloud Platform Remote Management

RG-NBS3100 not only supports web interface management, but also supports Ruijie Cloud app and Ruijie Cloud platform remote management. Users can view the network status, modify the configuration, and troubleshoot at home.



4 Technical Specifications

Model	RG-NBS3100- 24GT4SFP	RG-NBS3100- 8GT2SFP	RG-NBS3100-24GT4SFP-P	RG-NBS3100-8GT2SFP-P		
Fixed ports	24 10/100/1000Base- T ports, 4 SFP 1000Base-X ports	8 10/100/1000Base- T ports, 2 SFP 1000Base-X ports	24 10/100/1000Base-T ports, 4 SFP 1000Base-X ports	8 10/100/1000Base-T ports, 2 SFP 1000Base-X ports		
PoE/PoE+ Enabled ports	N/A		24	8		
Maximum PoE output power per switch	N/A		370W	125W		
IEEE802.3at	Not Support		Support			
Switching capacity	336Gbps	192Gbps	336Gbps	192Gbps		
Packet forwarding rate	42Mpps	15Mpps	42Mpps	15Mpps		
MAC address	Support static MAC address, MAC address filtering					
MAC address table size	8K					
Number of VLANs			4094			
Link aggregation	Support					
Port mirroring	Many-to-one mirroring					
Spanning tree	STP, RSTP					
LLDP	Support					
IP routing	N/A					
ACL	IP standard ACL MAC extended ACL IP extended ACL Port ACL for Layer 2 p	orts (physical port / Al	P)			

Redefine your easy network

QoS	Port-based speed limit (ingress/egress)				
Security	Port protection Hardware CPP				
Management	Web management, Ruijie Cloud or Ruijie Cloud app management				
DHCP	DHCP snooping				
EEE	Support				
Physical specif	ications				
Dimensions	440×165×44mm	260x120x43.6mm	440×293×44mm	300x220x43.6mm	
Temperature	Operating temperature: 0 $^{\circ}$ C ~ 50 $^{\circ}$ C Storage temperature: -40 $^{\circ}$ C ~ 70 $^{\circ}$ C				
Humidity	Operating humidity: Storage humidity: 5%				



5 Ordering Information

Model	Description		
RG-NBS3100-24GT4SFP	24 10/100/1000Base-T ports, 4 SFP 1000Base-X ports, support unified		
	management via Ruijie Cloud platform		
RG-NBS3100-8GT2SFP	8 10/100/1000Base-T ports, 2 SFP 1000Base-X ports, support unified		
	management via Ruijie Cloud platform		
RG-NBS3100-24GT4SFP-P	24 10/100/1000Base-T ports (support PoE and PoE+), 4 SFP		
	1000Base-X ports, 370W PoE power, support unified management		
	via Ruijie Cloud platform		
RG-NBS3100-8GT2SFP-P	8 10/100/1000Base-T ports (support PoE and PoE+), 2 SFP		
	1000Base-X ports, 125W PoE power, support unified management		
	via Ruijie Cloud platform		





